

# SHOWERS

FORT BLISS, TX

## DRAWING INDEX


- A-1 COVER SHEET & FLOOR PLAN
- A-2 EXTERIOR ELEVATIONS & BUILDING CROSS SECTION
- A-3 INTERIOR ELEVATIONS
- A-4 REFLECTED CEILING PLAN & HVAC PLAN
- S-2 FLOOR & ROOF FRAMING PLAN & TYPICAL OUTRIGGER FRAME
- P-1 DWV ISOMETRIC
- P-2 WATER SUPPLY ISOMETRIC
- E-1 ELECTRICAL PLAN

## DESIGN LOADS

ROOF LIVE LOAD: 20 PSF  
 FLOOR LIVE LOAD: 50 PSF  
 BASIC WIND SPEED: 90 MPH  
 IMPORTANCE FACTOR: 1.0  
 BUILDING CATEGORY: II  
 EXPOSURE: C  
 SEISMIC USE GROUP: CATEGORY I  
 SITE CLASS: D  
 SEISMIC IMPORTANCE FACTOR: 1.0  
 BUILDING AREA: 540 S.F.  
 OCCUPANT LOAD: 5

## DESIGN CRITERIA

2003 IBC  
 2003 IMC  
 2003 IPC  
 2005 NEC  
 OCCUPANCY CLASS: B  
 CONSTRUCTION TYPE: VB

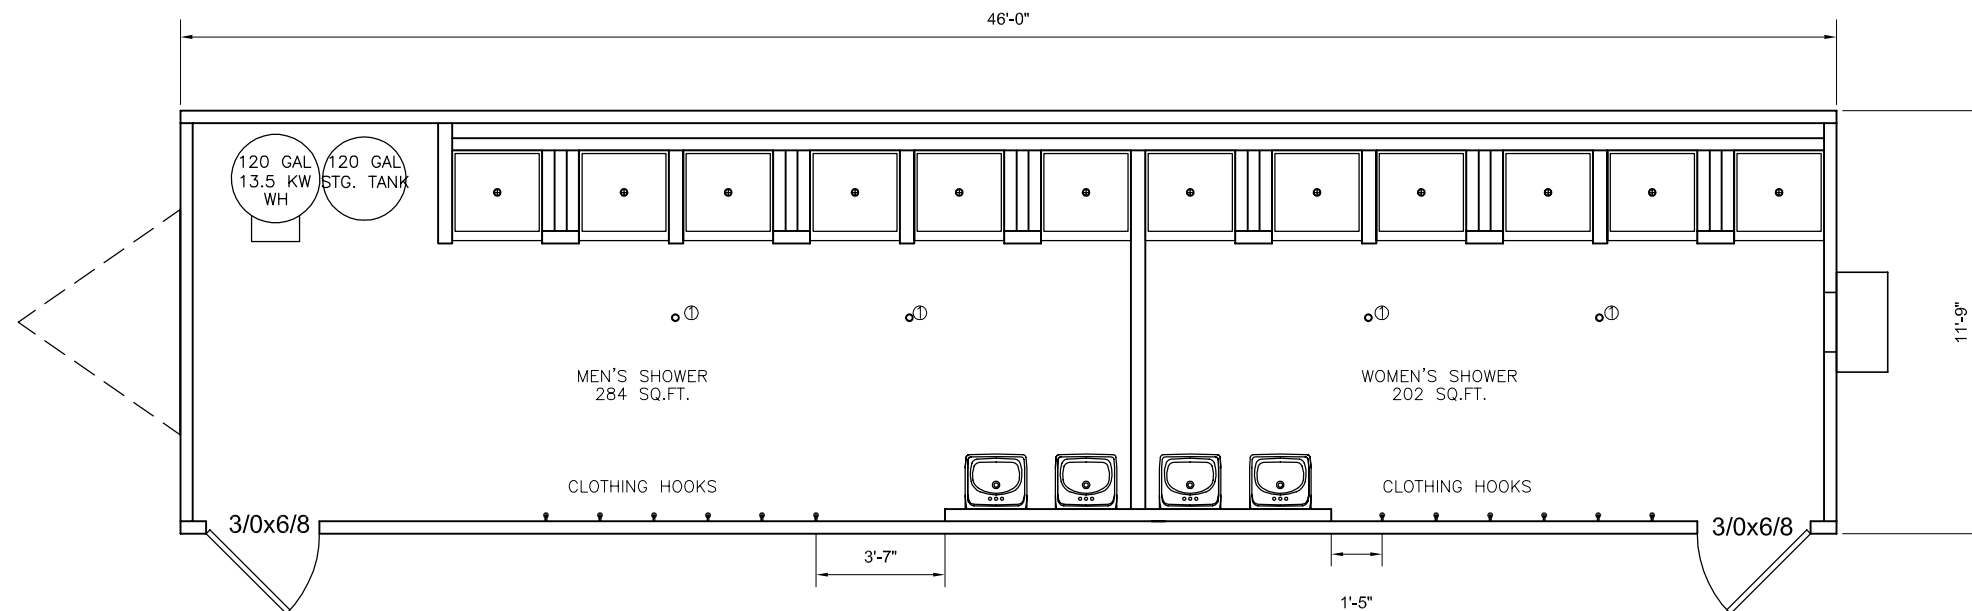

KEY NOTES  
 Ⓞ 2" FLOOR DRAIN  
 W/ ODOR SHIELD

## DOOR LEGEND

CALLOUT	NOMINAL SIZE	MATERIAL	HARDWARE	GLAZING	NOTES
3/0x6/8	3'-0" x 6'-8"	18ga. STEEL DOOR W/ 16 ga. FRAMES	LEVER / PANIC	NONE	THRESHOLD, CLOSURE FALCON "B" SERIES CORES, KICK PLATE
THRESHOLDS NOT TO EXCEED 1/2", AND ARE TO BE BEVELED IF IN EXCESS OF 1/4"					

RELEASED FOR PRODUCTION

**ICON CONSTRUCTION**  
© 2005, Icon Construction, Inc. All Rights Reserved

No.	DESCRIPTION	BY	DATE

DATE: 10-08-2008	SCALE: 3/16" = 1'-0"
PLOT SCALE: 1:1	DRAWN BY: ba
CHECKED BY:	

COVER SHEET & FLOOR PLAN  
 SHOWER  
 FORT BLISS  
 JOB #: M8550  
 SERIAL #: 3082

SHEET No.  
**A-1**

File: SHOWER BUILDING.dwg Plot Date: 10/08/08